SPACEMAN

BLUE ICE MACHINES



T34-C

SOFT SERVE FREEZER

Two Flavor, Countertop, Dual Controls
A: Pump Feed Model **with pasteurization**

CE

Most **Compact** & **Versatile** two-flavor countertop model with independent intelligent controls for ice cream and frozen yogurt

Fast Freeze Down
Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display
Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Operation Logging
Logs every operation and error to provide history and data for easy troubleshooting

Auto Programming
Allows automatic switching of operation modes based on preset schedules

Hopper Agitators
Maintain product consistency and prevent product separation

Soft System Start
Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission
Eliminates consumable moving parts and increases transmission efficiency

Defrost for Cleaning
Increases efficiency during cleaning by heating frozen product in cylinder

Quick Freeze
Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

Self Closing Valve with Speed Control
Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control

Safety Protections
- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

Ideal for any restaurants, convenience stores, dessert stands and delis to serve ice cream and gelato. Small foot print and low energy consumption help reduce operating cost.



BLUE ICE MACHINES LTD
UNIT F & G LEA RD TRADING ESTATE, WALTHAM ABBEY, EN9 1AE


PHONE: +44 208 801 6919
Email: info@blueicecreammachine.co.uk
www.blueicecreammachine.co.uk

SPACEMAN

BLUE ICE MACHINES

T34-C

SOFT SERVE FREEZER

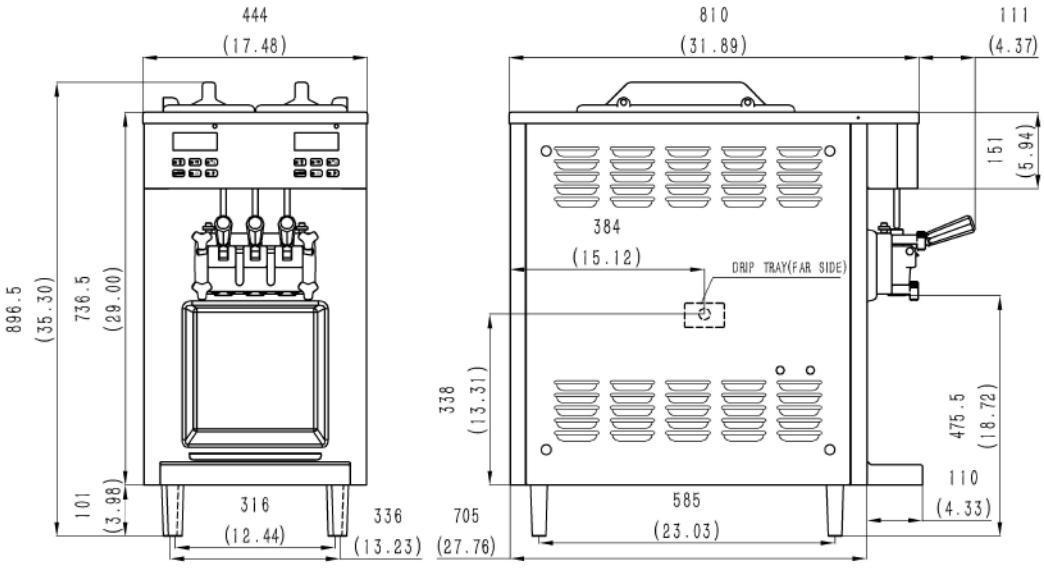

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.2L / 1.3qt
Mix Hoppers	2 x 8.0L (5L for A)
Output Capacity (80 grams)	280 serves/hr
Clearance Requirements	None

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	126 / 280	135 / 300
Shipping	141 / 313	150 / 330
Volume	0.48 CBM / 16.95 CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	444 / 17.5	530 / 20.9
Depth	705 / 27.8	830 / 32.7
Height	897 / 35.3	1080 / 42.5

Electrical	MFS	MCA	Power(kW)
220-240/50/1	15	11	1.9
208-230/60/1	15	11	2.0

FEATURES

Control Systems	Double, Digital
Refrigerated Hoppers	☑
Hopper Agitators	☑
Temperature Display	☑
Standby Mode	☑
Auto Closing Dispensing Valves	☑
Dispensing Speed Control	☑
Low Mix Indicator Light & Alarm	☑
Low Temperature Protection	☑
Motor Overload Protection	☑
High Pressure Protection	☑
Defrost & Quick Freeze	☑
Soft Start	☑
Direct Drive Pump (A only)	☑

AVAILABLE OPTIONS

Water Cooled	■
Cart (Trolley)	☑

• Above specifications are subject to change without notice

SPACEMAN USA
224 Commerce St. Unit A1,
Broomfield, CO 80020

PHONE: +01 720-328-1020 FAX: +01 720-528-8113
Email: sales@spacemanusa.com
www.spacemanusa.com

02/2020