



## GAS FRYERS



G3865 Fryer

### MODELS and ACCESSORIES

**G3830** Single pan, single basket fryer

**G3860** Single pan, twin basket fryer

**G3865** Twin pan, twin basket fryer

- Side and back screens c/w draining shelf (300mm wide unit)
- Side and back screens c/w draining shelf (600mm wide unit)
- Factory fitted, adjustable castors
- Fixed installation kit
- Suiting kit

### KEY FEATURES

- Single or twin pan models available
  - Choose to suit your menu requirements
- Stainless steel hob with mild steel pan
  - Robust construction to withstand busy demands
- Temperature range between 140 - 190°C
  - Variable, precise control
- Sediment collection zone
  - Keeps oil cleaner for longer
- Piezo ignition
  - Simple, trouble-free operation
- Fast-acting safety thermostat
  - Peace of mind if oil accidentally overheats
- Lid supplied as standard
  - Protects and extends oil life
- Fish grid supplied as standard
  - Keeps cooked portions off pan base
- Large diameter drain valve
  - For simple and efficient pan draining
- No electrical supply required
  - Simple to install and operate

### INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.


A clearance of 150mm should be observed between appliance and any combustible wall.





## GAS FRYERS

### MODEL DIMENSIONS (in mm)

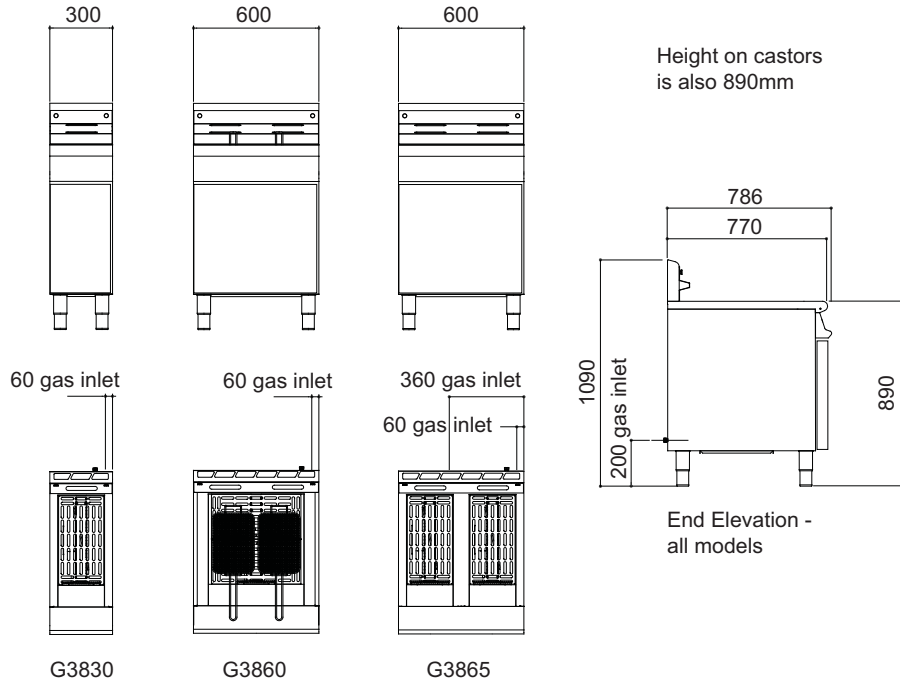

### SPECIFICATION DETAILS

	<b>G3830</b>	<b>G3860</b>	<b>G3865</b>
Total rating (natural and propane - kW - Nett)	16.7	30	2 x 16.7
Total rating (natural and propane - btu/hr - gross)	62,700	112,600	2 x 62,700
Inlet size (natural and propane)	1/2" BSP	3/4" BSP	1/2" BSP x 2 **
Flow rate - natural (m <sup>3</sup> /hr)	1.75	3.14	3.5
Flow rate - propane (kg/hr)	1.23	2.22	2 x 1.23
Inlet pressure (natural and propane - mbar)	20 / 37	20 / 37	20 / 37
Operating pressure (natural and propane - mbar)	13 / 34.5	11.2 / 34.5	13 / 34.5
Oil capacity (litres)	15	24	15 x 2
Hourly chip output * (kg)	32	54	32 x 2
Weight (kg)	59	74	99
Packed weight (kg)	65	81	106

**Notes:**

\* denotes pre-blanched, chilled 10mm size

\*\* denotes termination in 3/4" BSP manifold