

# Storm Glasswashers



## FEATURES

- High grade 304 stainless steel construction
- Pressed tank and rounded corners to aid cleaning of machine
- Double skin door for quieter running and improved efficiency
- Rotating wash and rinse arms removable for cleaning
- Automatic detergent and rinse aid dosing
- 3 cycles - 90/120/180 secs
- Thermo-stop** ensures a hot rinse temperature on every cycle
- Adjustable wash and rinse thermostats
- ¾" BSP water inlet hose included
- UK 13A plug fitted
- STORM50 models - can be upgraded by changing mains supply cable to 30A single phase or 15A 3phase power supply
- Supplied with 2x glass baskets and 1x cutlery holder
- Gravity and integral drain pump models available
- Manual COLD rinse option (STORM40 and 40DP models only)
- Cold or Hot water supply max 60°C at 2 – 4bar (excl. STORM40)


## OPTIONAL EXTRAS

Manual water softener	F1-DEP12	
Auto water softener	CEPSS-1300	
Water inlet hose (1.5 metre)	P1-3510	
350mm x 350mm glass basket	B8-12024550	
400mm x 400mm glass basket	B8-12025069	
500mm x 500mm glass basket	B8-12025011	
Universal stand	G2-STU	

**Note: If optional extras sold separately, there is a delivery charge of £10.95+ VAT**

### Thermo-stop

Thermo-stop feature ensures the cycle cannot be completed until the rinse water temperature has achieved sanitising temperatures above 82°C.

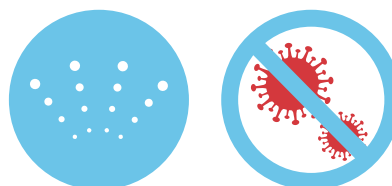

STORM35



STORM35DP



STORM40DP



STORM40



**1**  
YEAR  
WARRANTY

**304**  
STAINLESS  
STEEL

**Blizzard**™

# Storm Glasswashers

## Recessed door handle


Ergonomically designed door handle for easy opening and a flush finish.



## Easy cleaning & maintenance

Easy to clean interior with rounded corners in wash tank, removable wash and rinse arms and specially designed wash filter (catches and contains debris within bottom flange).

*Reducing the risk of debris falling into the wash pump or drain when the filter is removed for cleaning.*



## User-friendly control

Intuitive electro-mechanical control panel built with on/off and 3 cycle selection buttons.



### IMPORTANT NOTES

If you are installing a glass or dishwasher in a hard water area, we recommend you to fit a water softener. Faults attributed to poor water quality are not covered under the manufacturer's warranty.

### F1-DEP12



### STORM50



### STORM50DP



MODEL	PIECES /CYCLE	GLASS MAX HEIGHT	WATER USAGE	BASKET SIZE (mm)	EXT. DIMENSIONS (H x W x D mm)	POWER CONSUMPTION	WEIGHT (kg)	RRP
STORM35	13 pint glasses	220mm	2L	350 x 350	650 x 430 x 475	2.7 KW	37	
STORM35DP	13 pint glasses	220mm	2L	350 x 350	650 x 430 x 475	2.7 KW	40	
STORM40	16 pint glasses	270mm	2.5L	400 x 400	720 x 470 x 520	2.7 KW	44	
STORM40DP	16 pint glasses	270mm	2.5L	400 x 400	720 x 470 x 520	2.7 KW	47	
STORM50	25 pint glasses	320mm	2.7L	500 x 500	820 x 600 x 600	2.6KW (* 6.2KW)	67	
STORM50DP	25 pint glasses	320mm	2.7L	500 x 500	820 x 600 x 600	2.6KW (* 6.2KW)	70	
Power conversion charge (STORM50)								

based on 90mm diameter pint glass

\* Can be upgraded by changing mains supply cable to 30A single phase or 15A 3phase power supply



See page 205 for optional stands

