

## 160 Line Refrigerated Counter 160 lt - undercounter glass door (white)


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

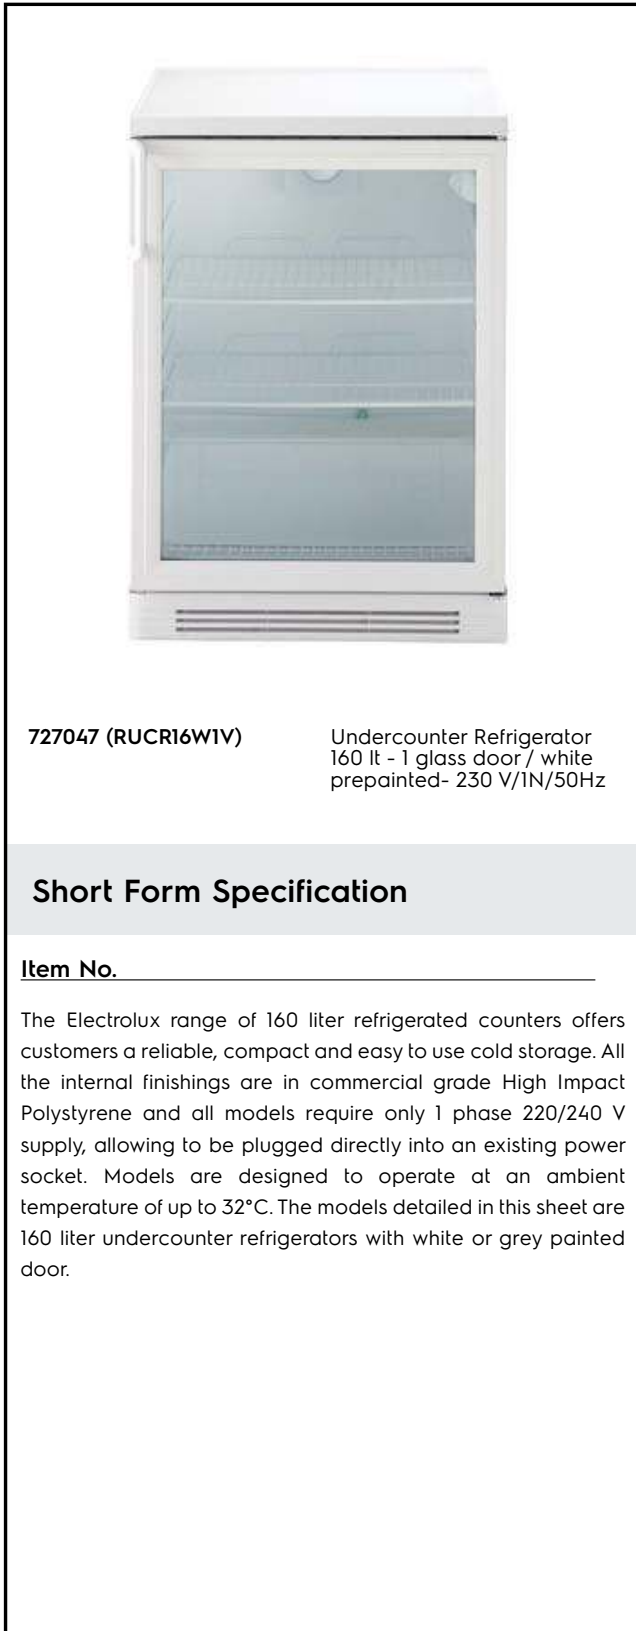
**727047 (RUCR16W1V)**

 Undercounter Refrigerator  
 160 lt - 1 glass door / white  
 prepainted- 230 V/1N/50Hz

### Short Form Specification

**Item No.** \_\_\_\_\_

The Electrolux range of 160 liter refrigerated counters offers customers a reliable, compact and easy to use cold storage. All the internal finishings are in commercial grade High Impact Polystyrene and all models require only 1 phase 220/240 V supply, allowing to be plugged directly into an existing power socket. Models are designed to operate at an ambient temperature of up to 32°C. The models detailed in this sheet are 160 liter undercounter refrigerators with white or grey painted door.

### Main Features

- Internal light and lockable door.
- Suitable for use in ambient temperatures of up to 32 °C.
- Refrigerators models have operating temperatures that can be adjusted from +2 to +10 °C to suit both meat and dairy storage requirements.
- Very quiet operation: noise level less than 45 dB (A).
- Automatic defrost and automatic evaporation of defrost water.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Compact cooling unit easily accesible from the rear of the appliance.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.

### Construction


- Interior cell is completely in white High Impact Polystyrene and has no joints to eliminate dirt traps.
- CFC and HCFC-free insulation.
- Refrigerant type: R134a.
- IP23 protection index.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- The rounded internal corners, the easily removable grids allow for ease of cleaning and high hygiene standards.
- 30 mm thick insulation with cyclopentane injection for long-term insulation and energy saving.
- Reversible door.
- Built-in refrigeration unit.

### Optional Accessories


- Rear wheel kit for 160lt for freestanding refrigerator and freezer PNC 880143
- Stacking kit for 160lt undercounter white painted refrigerator PNC 880148

**APPROVAL:** \_\_\_\_\_

Front

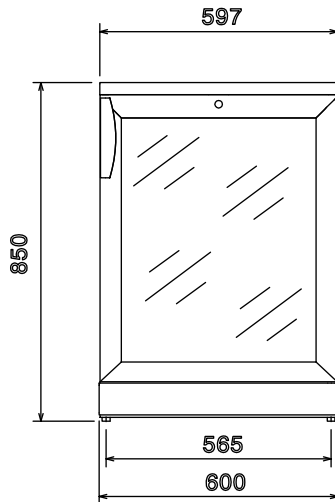


Side

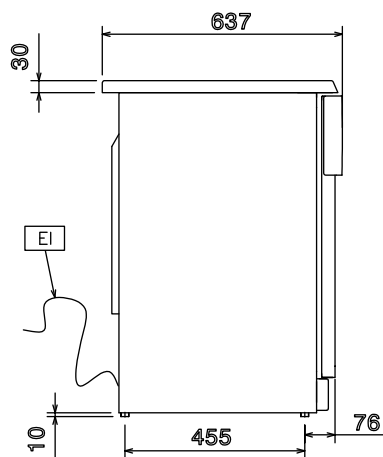

EI = Electrical inlet (power)

Top

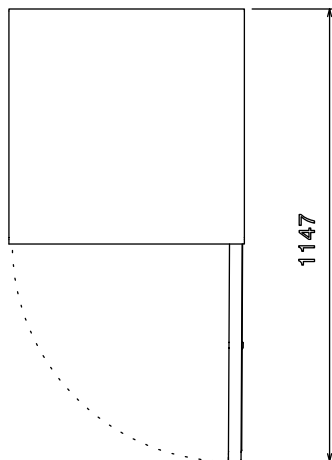

### Electric

Supply voltage:	727047 (RUCR16W1V)	220-240 V/1 ph/50 Hz
Electrical power max.:		0.15 kW

### Key Information:


Gross capacity:	165 lt
Net Volume:	87 lt
Door hinges:	
External dimensions, Width:	600 mm
External dimensions, Height:	850 mm
External dimensions, Depth with Doors Open:	
Number and type of doors:	1 Glass
Noise level:	47 dBA
Height adjustment:	0/10 mm
Number and type of grids (included):	3 -
External side panels:	Prepainted white
External top panels:	White ABS
External door material:	Glass
Internal panels material:	High Impact White Polystyrene
<b>Built-in Compressor and Refrigeration Unit</b>	

### Refrigeration Data

Control type:	Mechanical
Refrigerant type:	R134a
Refrigeration power:	163 W
Refrigeration power at evaporation temperature:	-12 °C
Refrigerant weight:	65 g
Operating temperature min.:	2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated

### Product Information (EU Regulation 2015/1094)

Energy Class:	B
Yearly and daily energy consumption:	675kWh/year - 1.85kWh/24h
Climate class:	Light Duty (cl.3)
Energy Efficiency Index (EEI):	33,55
Type of model:	counter chilled

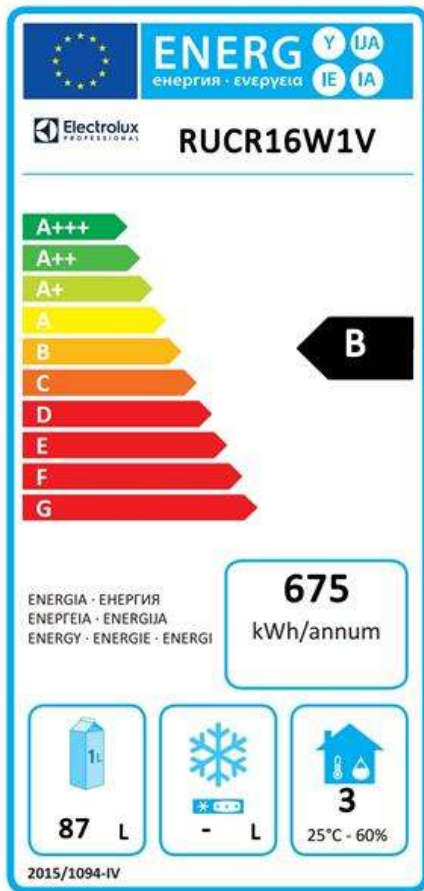

### EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe.

**Important:** all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.