infernus®

# Cone Baker

## Instructions

CE UKCA

Welcome you to buy our product. Now, the all our employees say to you with gratitude!

My plant mainly produce west kitchen equipments. Its product series have: Pick oven series, Fry oven series, baking oven series, American snack equipment and snack series product.

Before Switch on to, please read the instruction carefully in order to insure how to use it rightly.

Warning:

⑴This product must connect the ground line in safely before use.

⑵ Not use the spray pipe to clean it. Cone Baker series have absorbed the advantage of the same kind product from the foreign on design and have a novel style , reasonable structure. In addition, you can operate it expediently and heat it up quickly. Also the temperature is even and it economizes on energy etc.. They are applicable to the places, such as market, supermarket, the cold drink store, snack shop and public house etc..

## 1. Basic Parameter:

| Mode | Product Size(mm) | Voltage(V) | Power(kw) | Control Switch |
|---|---|---|---|---|
| INF-CB1 | 250×350×260 | 220 | 1 | 1 Set |

## 2. Transportation and Safekeeping:

In transport process, this product should be handled carefully in order to prevent violent vibration. Generally, the packed product shouldn't be long-term to deposit on the open-air, and you should put it at a storehouse where is well ventilated and has no corrosive air inside. Not set upside down. If you need to deposit it at the time, you should take measures to defend the rain.

## 3. The Regulations on Installation and The Usage Environment:

①This product should be put in a steady place, and the distance of its two sides should be more than 10㎝ to non-combustible thing, The back should leave more than 20cm of non-combustible thing(for example: the brick wall etc.).

②The voltage of power supply on this equipment must agree with the voltage of power supply on the product card.

③The customer need to set power switch, machine of melting break and the machine of electric leakage protection in the equipment nearby. The front of switch forbids heaping sundries for convenient operation.

④This equipment must connect the ground line safely before use.

⑤Before switch it on, you should check whether the conjunction of each electric component is firm or not, and the safety connect ground whether is credible.

⑥Replace the power cable should choose to the same model electric cable, and ask professional person to replace.

⑦During the electric connection of this product on installation and maintain, you should please ask the person who have a certificate on electrician operation to install.

## 4. The Method on Operation

(1) The temperature controller is set in the front of the product for controlling the temperature of the heating template in order to ensure the need of use temperature.

(2) Connect the power supply, turn the power on, and then the Indicating lighter of the switch power supply will be bright, and revolve the temperature controller clockwise to adjust the temperature value aim at the temperature position needed. And then the orange heating indicator is bright at this time. The electric current has already provided to the stove, and the heating template begins to heat. When the temperature get to the temperature needed, the temperature controller cut off the power supply automatically. At the same time, the orange indicator goes off, and the heat plank stops to heat. When the temperature slightly descends, then the temperature controller can connect the power supply automatically and the orange indicator will be bright again, and the machine heat up again and the temperature rises. Thus do it again and again in order to ensure the temperature within the scope of setting. According to the demand, regulate the temperature to go to the need of the temperature so that it can get ideal result.

(3) After the machine has heated, smear some food oil on the top and bottom template, put the ice cream powder on the bottom template, cover the top template, settle the timer to the need of time, heat up to the enactment time and it will remind that your time has already arrived, open the top template, use the wooden staff to iris out from the bottom template, and take out after it cool off. At this time, the ice cream skin has already been made well.

(4) If it appears excrescent phenomenon in use process, you must stop it immediately. After it was checked and the fault has removed, you can continue to use.


## 5. Sweep and Maintain:

①Before sweeping and maintaining, please cut off the power supply in order to prevent the accident.


②Use the wet towel which has no Corrosive cleanser to clean its surface and the power supply derivation line surface after the task has been completed everyday. Forbid to use the water to wash it directly in order to prevent to damage its electricity function.

③During the sweeping, remove the water in the top and bottom template in time, in order to prevent to overflow.

## 6. Electricity Principle Diagram:

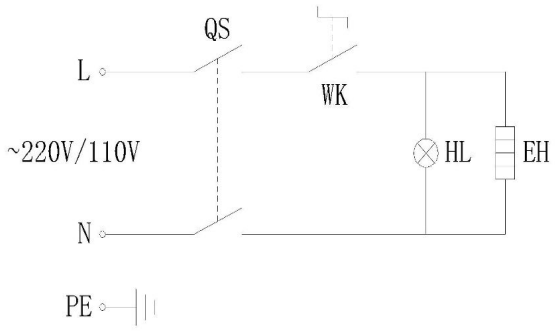


QS:Switch WK:Temperature Controller
EH:Heater HL:Heating indicator

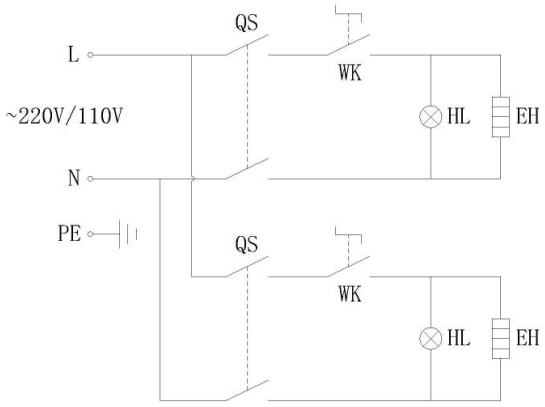


QS:Switch WK:Temperature Controller
EH:Heater HL:Heating indicator

## 7. Guarantee clause: The product will be maintained for life .

⑴The term of validity for “three guarantee” is: six months

⑵The acknowledgement on the term of validity for “three guarantee”: calculate it from the day of sale, deduct the day of delay, which result from the repair or without accessories .If the last day of the term of validity is a legal holiday, and take the next day of the holiday as the last day of the term of validity.

⑶ Belong to one of the following circumstances, practice reasonable charge for repair:

A, More than the term of validity

B, Have no voucher and note of the term of validity, except those who can prove in the day of the term of validity.

C, The content of the voucher does not tally with the product sign or it has been altered.

D, Not use the product according to the instruction of usage and maintenance, which result in the damage.

E, The damage from the force majeure .

F, The parts that are the substitutes of maintain all belong to my factory.

G, To the product fault, my plant will not compensate for other obligation which is out of the guarantee.

(The modification of the instruction, please forgive not to notice.)