

POWERING YOUR *life.*

Model 500988

EAN 5060423986560

Warranty 3 Years

3600

MAX WATTS
Propane: 3600

3500

RUNNING WATTS
Propane: 3150

RUN TIME 14 hrs. **RUN TIME** 21 hrs. **NOISE LEVEL** 61 dBA

CLEAN ELECTRICITY
Low THD & True Sine Wave to power **SENSITIVE ELECTRONICS**


ULTRA QUIET
LOW NOISE - high performance

ELECTRIC START
Push-button start includes **BATTERY**

EZ START DIAL
Confusion free **ENGINE START-UP**

PARALLEL READY
Link 2 units for **DOUBLE POWER**

Receptacles

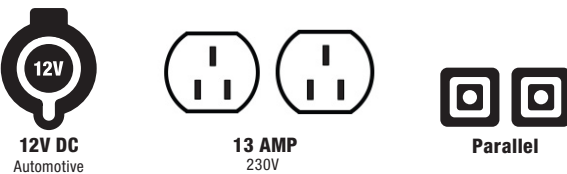

Specifications

START TYPE	Electric, Recoil
VOLTAGE (V) AC	230
VOLTMETER	Intelligauge c/w Power Meter
ENGINE SIZE (cc)	212
FUEL TYPE	Petrol or Propane
FUEL CAPACITY (L)	8.5
OIL TYPE	10W-30
OIL CAPACITY (ml)	500
LOW OIL SHUT-OFF	Yes
EMISSIONS	EU V, EPA III/CARB

Our 3600 watt inverter generator features Dual Fuel allowing the 212cc engine to run on petrol or propane. Enjoy the quiet 61 dBA for up to 14 hours on petrol or up to 21 hours with a 9kg propane tank and increase your power with the optional Parallel Kit.

Inside the box

- GENERATOR
- PROPANE HOSE 6 FT.
- OPERATOR'S MANUAL
- OIL FUNNEL
- USB ADAPTER
- 8/10 MM WRENCH
- SPARK PLUG SOCKET
- REVERSIBLE PHILLIPS/ FLATHEAD SCREWDRIVER

What You Need

- PETROL OR PROPANE
- ENGINE OIL

*Specifications, descriptions and illustrations are subject to change without notice.

PACKAGE (gross)
Weight: 52.9kg.
Size: 27.8 x 20.9 x 23.4 in.

PRODUCT (net)
Weight: 46.7kg
Size: 23.3 x 17.7 x 20.1 in.

CHAMPION POWER EQUIPMENT EU
Unit 17-18, Bradley Hall Trading Estate, Standish, Wigan, WN6 0XQ, United Kingdom
www.championpowerequipment.co.uk